




Technical Data Sheet

Iristek Coloured Paint Protection Film

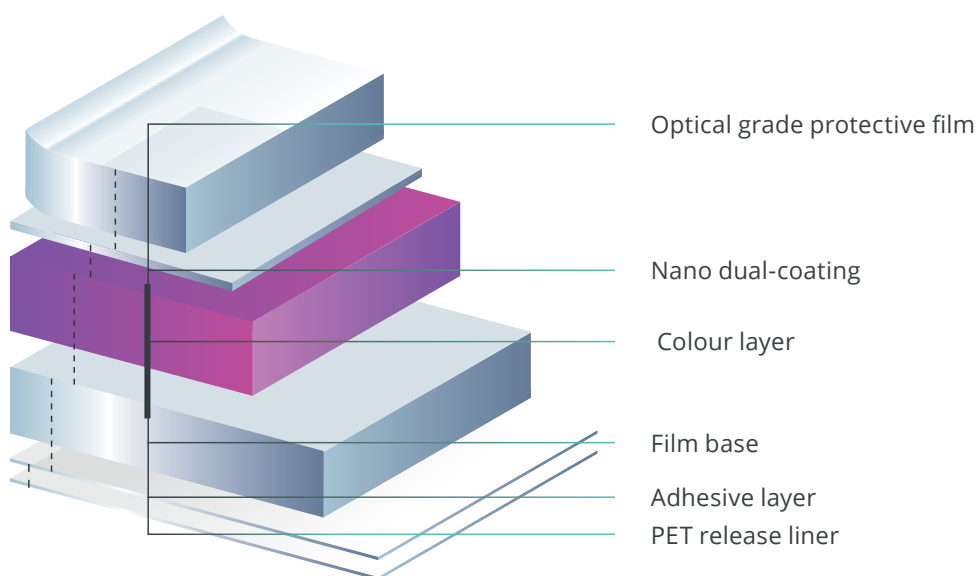

ITEM	SPECIFICATIONS
Thickness	208um
Protective layer	50um
Nano dual-coating	8um
Color layer	75um
Film base	75um
Pressure sensitive adhesive thickness	30um
Release liner	75um
Adhesive	High-performance pressure sensitive
Removable	Yes

PRODUCT FEATURES	
Tensile strength	17,5Mpa
Glossiness	>90
Elongation at break	452%
Adhesive	Removable, repositionable, non-yellowing acrylic
Resistance	The film is resistant to general-use automotive fuels.
Storage conditions:	Store in an ambience with temperatures between 15°C and 28°C with relative humidity 50%.

REMARKS:

** IRISTEK's products are made of high quality raw materials, advanced technology production equipment, strict and scientific quality control. All products got quality assurance before they leave the factory to be sure following with the product indexes within validity period.

** The above data is subject to change by Iristek without advance notice.

** Consumers should make suitability testing before using the products since it is not fully guaranteed for use under all circumstances.