




# Technical Data Sheet

## IRISTEK Car Wrap Film

Multicolor & various special effects: matte chrome, macaron, pearl metallic, 3D psychedelic, chameleon, pearl glitter and diamond.

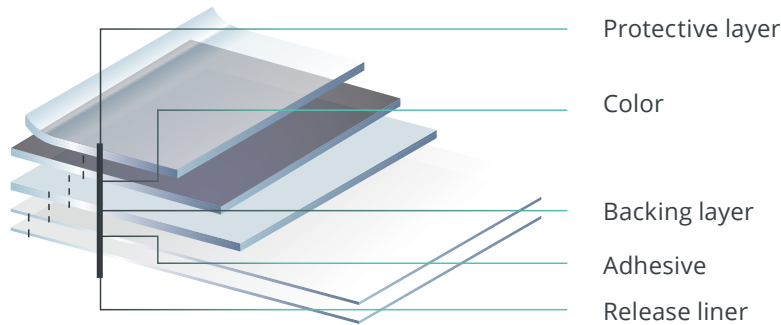

ITEM	SPECIFICATIONS
Film	3-layer improved cast coating polymeric film
Thickness	165um (6.6 mil)
Protective layer	50um (2 mil)
Color layer	25um (1mil)
Backing thickness	50um (2 mil)
Pressure sensitive adhesive thickness	40um (1.6 mil)
Release liner	160g embossed laminated release liner
Adhesive	High-performance acrylic adhesive (high tack)
Surface	High glossy, matte, pearl metallic, pearl glitter, 3D psychedelic
Removable	Yes

PRODUCT FEATURES	
ITEM	SPECIFICATIONS
Tensile strength	>40N/15mm
Tensile elongation yield	>200%
Initial tack after wrapped	20 minutes 18N/25mm
Initial tack after wrapped	24 hours 20N/25mm
Adhesion after wrapped	1 week 22N/25mm
Operating temperature range	-40 - 70°C
Storage conditions:	Store in an ambience with temperatures between 15°C and 28°C relative humidity from 25% to 65%, 2 years.

**REMARKS:**

\*\* IRISTEK's products are made of high quality raw materials, advanced technology production equipment, strict and scientific quality control. All products got quality assurance before they leave the factory to be sure following with the product indexes within validity period.

\*\* The above data is subject to change by Iristek without advance notice.

\*\* Consumers should make suitability testing before using the products since it is not fully guaranteed for use under all circumstances.